

Telephone: 4414 Central, Private Branch Exchange. Telegrams: "BELSIZE, MANCHESTER."

BELSIZE MOTORS

LIMITED,
CLAYTON, MANCHESTER

1914.

BIRMINGHAM: 208, Corporation Street.

LONDON: J. KEELE LTD., 72, New Bond Street, W. BELSIZE LONDON AGENCY LTD., Dean's Yard, Cavendish Square, W.

10-12 h.p. Four-cylinder Car.

Price, £215.

TWO-SEATER.

Complete with Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the road.

SPECIFICATION.

ENGINE.—Cylinders cast "en bloc," each 69 mm. bore × 130 mm. stroke. All valves on one side of the cylinders, operated by single camshaft

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.—Automatic.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH .- Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Three forward speeds and reverse. Through drive on third speed.

BACK AXLE.-Worm or bevel drive with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, coupled to foot accelerator.

WHEELS.-Wooden, detachable.

TYRES.-800 mm. × 85 mm. Continental, Dunlop, or Michelin, at option.

BODY.—Fitted with side doors and scuttle dash, with ample seating accommodation for two persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery. (Fine lining one guinea extra.)

DIMENSIONS.—Wheel base, 8 ft. 1 in.; track, 4 ft. 3 in.; overall length, 11 ft 3 in.; overall width, 5 ft. 3 in.

With Hood and Wind Screen (including side and tail lamps, horn, and tool kit, ready for the road)
With Hood, Wind Screen, and Dickey Seat(including side and tail lamps, horn, and tool kit, ready for the road) £23
Chassis only (including four tyres, as specified) £19
The above prices are based on the Tyn Lists issued by the various Companie in October, 1913. The right is reserved to increase suc prices if the list prices of Tyres shoul be advanced from time to time.
EXTRAS.
Steel, or Riley "O" type wire, detachable wheels

with bolt head attach-

ment and spare wheel

fitted with 800 mm. × 85

wheel, with 800 m.m. × 85

Fifth wooden detachable


Two acetylene head lamps

Painting in other than

m.m. tyre 7 10 0

and brackets from 5 10 o

standard colours 5 0 0

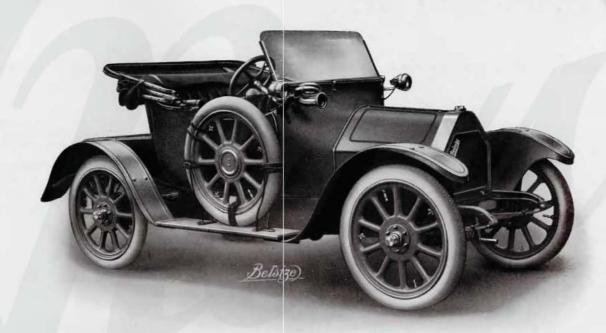

10-12 h.p. Belsize Four-cylinder Two-seater Car.

10-12 h.p. Four-cylinder Car.

Price, £240.

FOUR-SEATER.

Complete with Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road.

SPECIFICATION.

ENGINE.—Cylinders cast "en bloc," each 69 mm. bore x 130 mm. stroke. All valves on one side of the cylinders operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.—Automatic.

WATER COOLING.-Thermo-syphon, with radiator of large capacity.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Three forward speeds and reverse. Through drive on third speed.

BACK AXLE.-Worm or bevel drive with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, coupled to foot accelerator.

WHEELS.-Wooden, detachable.

TYRES.-Soo mm. × 85 mm. Continental, Dunlop, or Michelin, at option.

BODY.—Fitted with side doors and scuttle dash, with ample seating accommodation for four persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery. (Fine lining one guinea extra.)

DIMENSIONS.—Wheel base, 8 ft. 7½ in.; track, 4 ft. 3 in.; overall length, 11 ft. 8 in.; overall width, 5 ft. 3 in.

With Hood and Wind Screen (including side and tail lamps, horn, and tool kit, ready for the road) \$255
Chassis only (including four tyres, as specified) £195
The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.
The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.
X
EXTRAS.
Steel, or Riley "O" type wire, detachable wheels with bolt head attachment and spare wheel fitted with 800 mm. x 85 mm. tyre
Fifth wooden detachable wheel, with 800 mm. × 85
mm. tyre 7 10 0


Two acetylene head lamps

Painting in other than

standard colours 5

and bracketsfrom 5 to o



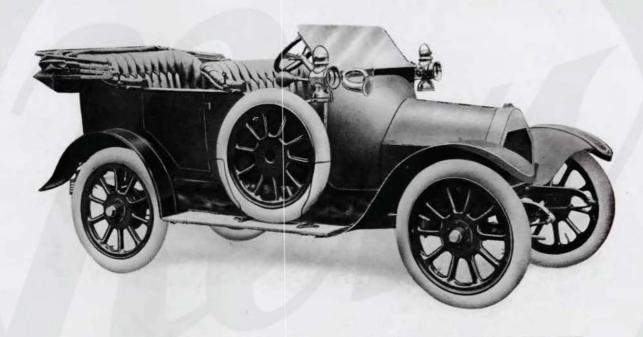

10-12 h.p. Belsize Four-cylinder Four-seater Car.

10-12 h.p. Four-cylinder Car.

Price, £315.

WITH SALOON COUPÉ BODY.

Complete with Electric Side and Tail Lamps with Accumulators, or Oil Lamps. Horn and Tool Kit, ready for the Road.

SPECIFICATION.

ENGINE.—Cylinders cast "en bloc," each 69 mm. bore x 130 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.—Automatic.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Three forward speeds and reverse. Through drive on third speed.

BACK AXLE.-Worm drive with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, coupled to foot accelerator.

WHEELS.-Wooden, detachable.

TYRES.—Soo mm. × 85 mm. Continental, Dunlop, or Michelin, at option.

BODY.—Solid top saloon Coupé, with drop down windows and adjustable glass front and dickey seat, with ample seating accommodation for two persons inside. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery. (Fine lining one guinea extra.)

DIMENSIONS.—Wheelbase, 8 ft. 71 in.; track, 4 ft. 3 in.; overall length, 11ft 8in.; overall width, 5 ft. 3in.

Chassis only, including four Tyres, as specified... £195


The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.



EXTRAS.

standard colours 5 0 0

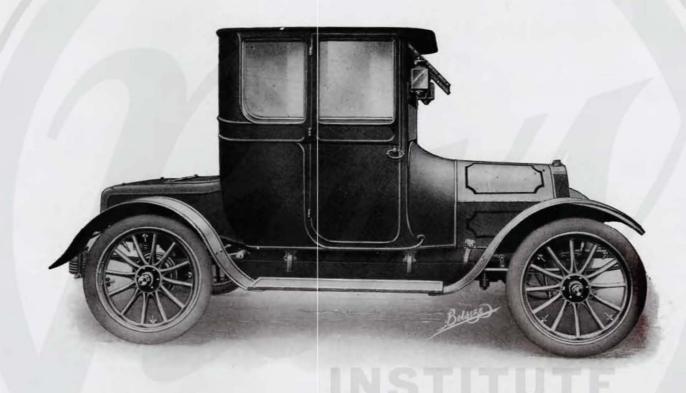

10-12 h.p. Belsize Four-cylinder Car with Saloon Coupé Body.

10-12 h.p. Four-cylinder Car.

Price, £340

DOCTOR'S LANDAULETTE BODY. WITH

Complete with Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road.

SPECIFICATION.

ENGINE.—Cylinders cast "en bloc," each 69 mm. bore × 130 mm. stroke. valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.-By pump fixed in reservoir of large capacity at the bottom of crank case

IGNITION.—Bosch magneto.

CARBURETTER.—Automatic.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.-Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Three forward speeds and reverse. Through drive on third speed.

BACK AXLE.-Worm or bevel drive with differential of ample dimensions.

BRAKES.-External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.-Single finger lever control on steering column coupled to foot accelerator.

WHEELS.-Wooden, detachable.

TYRES.-800 mm. × 85 mm. Continental, Dunlop, or Michelin, at option.

BODY.-Of the usual landaulette type, with folding back, extension front, drop down windows and adjustable glass screen, with ample seating accommodation for two persons inside and two outside, wide side entrance, and side doors to front seats. The trimming and finish throughout are of the highest quality, and the car is designed to meet the requirements of the medical protession. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery. (Fine lining one guinea

DIMENSIONS.—Wheel base, 8 ft. 7} in.; track, 4 ft. 3 in.; overall length, 11 ft. 8 in. overall width, 5 ft. 3 in.

Chassis only, including Four Tyres as specified ... £195

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.




EXTRAS.

Steel, or Riley "O" type wire, detachable wheels with bolt head attachment and spare wheel fitted with 800 mm. x

Fifth wooden detachable wheel, with 800 mm. X 85 mm. tyre 7 10 0

Two acetylene head lamps and brackets from 5 10 0

Painting in other than standard colours 5 0 0

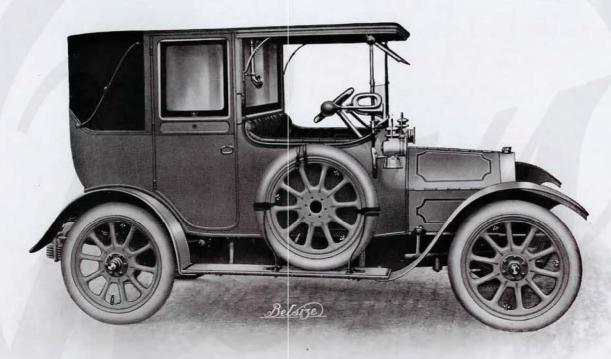

INSTITUTE

10-12 h.p. Belsize Four-cylinder Car with Doctor's Landaulette Body.

15.9 h.p. Four-cylinder Car. TWO-SEATER.

Complete with Hood, Single Wind Screen, Fifth Wheel and 815 x 105 Tyre, Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road - - - - -

£325

If fitted with Rotax-Leitner Electric Lighting Set, with Large Head Lamps

335

SPECIFICATION.

ENGINE.—Cylinders cast in pairs, each 80 mm. bore × 150 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.—Automatic. Petrol pressure fed.

WATER COOLING.-Thermo-syphon, with radiator of large capacity.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Four forward speeds and reverse. Through drive on fourth speed.

BACK AXLE.—Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column coupled to foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES .- 815 mm. × 105 mm. Continental, Dunlop, or Michelin, at option.

BODY —Fitted with side doors and scuttle dash, with ample seating accommodation for two persons. Painted and upholstered in red, bue, green, or Belsize grey with green upholstery. (Fine lining, one guinea extra.)

DIMENSIONS.—Wheel base, 9 ft. 6 in ; track, 4 ft 3 in ; overall length, 12 ft. 9 in ; overall width, 5 ft. 6 in.

Chassis only, including four Tyres, as specified... £265

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.




EXTRAS.

Two acetylene head lamps and brackets from £5 10 0

Painting in other than standard colours 5 o c



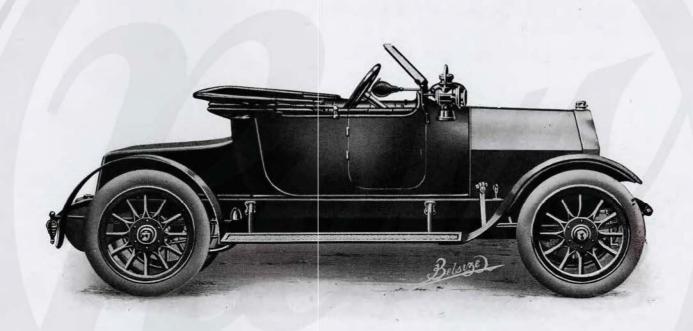

15.9 h.p. Belsize Four-cylinder Two-seater Car.

<u>Belsize</u>

15.9 h.p. Four-cylinder Car

Complete with Hood, Single Wind Screen, Fifth Wheel and 815×105 Tyre, Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road

£350

If fitted with Rotax-Leitner Electric Lighting Set, with large Head Lamps

360

SPECIFICATION.

ENGINE.—Cylinders cast in pairs, each 80 mm. bore × 150 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.—Bosch magneto.

CARBURETTER.-Automatic. Petrol, pressure fed.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Four forward speeds and reverse. Through drive on fourth speed

BACK AXLE.—Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.—External band type, acting on mainshaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column coupled to foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES.-815 mm. × 105 mm. Continental, Dunlop, or Michelin, at option.

BODY.—Either semi-torpedo with scuttle dash, carrying five persons, with ample room for three on the back seat,

Or full Torpedo with scuttle dash, having ample accommodation for four persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery. (Fine lining one guinea extra.)

DIMENSIONS.—Wheel base, 9 ft. 6 in.; track, 4 ft. 3 in.; overall length, 12 ft. 9 in.; overall width, 5 ft. 6 in.

Chassis only, including four Tyres, as specified... £265

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.




EXTRAS.

Two acetylene head lamps and bracketsfrom £5 10 0

Painting in other than standard colours 5 0 0



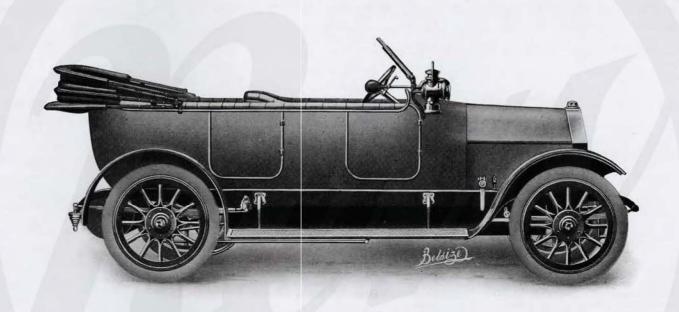

15.9 h.p. Belsize Four-cylinder Four-seater Torpedo Car.

15.9 h.p. Four-cylinder Car.

WITH SPORTING TYPE TORPEDO BODY.

Complete with Small Wind Screen (no Hood), Fifth Wheel and 815 × 105 Tyre, Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road

£375

If fitted with Rotax-Leitner Electric Lighting Set, with large Head Lamps

385

SPECIFICATION.

ENGINE.—Cylinders cast in pairs, each 80 mm. bore × 150 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.-Automatic. Petrol, pressure fed.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH.—Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Four forward speeds and reverse. Through drive on fourth speed.

BACK AXLE.—Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, coupled to foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES.—815 mm. × 105 mm. Continental, Dunlop, or Michelin, at option.

BODY.—The body is of the Belsize Sporting Torpedo Type, with carrying capacity for four persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery.

DIMENSIONS.—Wheel base, 9 ft. 6 in.; track, 4 ft. 3 in.; overall length, 12 ft. 9in.; overall width, 5 ft. 6 in.

Chassis only, including four Tyres, as specified... £285

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.



EXTRAS.

Two acetylene head lamps and bracketsfrom £5 10

Painting in other than standard colours 5 0



15.9 h.p. Four-cylinder Car.

WITH SPORTING TYPE TORPEDO BODY.

Complete with Small Wind Screen (no Hood), Fifth Wheel and 815 × 105 Tyre, Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road

£375

If fitted with Rotax-Leitner Electric Lighting Set, with large Head Lamps

385

SPECIFICATION.

ENGINE.—Cylinders cast in pairs, each 80 mm. bore × 150 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.-Bosch magneto.

CARBURETTER.-Automatic. Petrol, pressure fed.

WATER COOLING.-Thermo-syphon, with radiator of large capacity.

CLUTCH .- Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX.—Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Four forward speeds and reverse. Through drive on fourth speed.

BACK AXLE.—Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, coupled to foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES .- 815 mm. × 105 mm. Continental, Dunlop, or Michelin, at option.

BODY.—The body is of the Belsize Sporting Torpedo Type, with carrying capacity for four persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery.

DIMENSIONS.—Wheel base, 9 ft. 6 in.; track, 4 ft. 3 in.; overall length, 12 ft. 9in.; overall width, 5 ft. 6 in.

Chassis only, including four Tyres, as specified... \$285

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.



EXTRAS.

Two acetylene head lamps and bracketsfrom £5 10 0 Painting in other than

Painting in other than standard colours 5 0



15.9 h.p. Four-cylinder Landaulette.

Complete with Fifth Wheel and 815 x 105 Tyre, Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road

If fitted with Rotax-Leitner Electric Lighting Set for Side, Tail and Head Lamps

£450

SPECIFICATION.

ENGINE.—Cylinders cast in pairs each 80 mm. bore × 150 mm. stroke. All valves on one side of the cylinders, operated by single camshaft.

LUBRICATION.—By pump fixed in reservoir of large capacity at the bottom of crank case.

IGNITION.—Bosch magneto.

CARBURETTER.—Automatic. Petrol, pressure fed.

WATER COOLING.—Thermo-syphon, with radiator of large capacity.

CLUTCH,-Metal-to-metal, removable without disturbing engine or gear box.

GEAR BOX .- Cast solid with engine and clutch box, arranged so that the inside can be taken out without disturbing other parts. Four forward speeds and reverse. Through drive on fourth speed.

BACK AXI,E.-Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.-External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.-Single finger lever control on steering column coupled to foot accelerator.

WHEELS.-Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES .- 815 mm. × 105 mm Continental, Dunlop, or Michelin, at option. BODY.—The body is of the usual landaulette type, with folding back; extension front over driver's seat and folding glass screen. It is roomy and comfortable, has wide side entrances and is fitted with side doors to front seats. The trimming and finish throughout are of the highest quality, and the car is designed to satisfy every requirement.

The standard colours are as follow:-

- 1. Dark red, with black mouldings, dark red upholstery.
- 2. Dark green, with dark green upholstery.
- 3. Dark blue, with blue upholstery.

4. Belsize grey, with green upholstery DIMENSIONS.—Wheel base, 9 ft. 6 in.; track, 4 ft. 3 in.; overall length, 12 ft. 9 in.; overall width, 5 ft. 6 in.

Chassis only, including four tyres as specified ... £265

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.



EXTRAS.

Two acetylene head lamps and brackets from 65 10 0

Painting in other than standard colours 5 o o





15.9 h.p. Belsize Four-cylinder Landaulette.

18-22 h.p. Six-cylinder Torpedo.

Including Hood, Double Wind Screen, Electric Side and Tail Lamps, with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road - . £460

If fitted with Rotax-Leitner Electric Lighting Set, with Large Head Lamps - 470

SPECIFICATION.

ENGINE.—Six cylinders, cast in pairs, each $3\frac{9}{16}$ in. (93 mm.) bore \times $4\frac{3}{4}$ in. (120 mm.) stroke. Inlet and exhaust valves arranged on opposite sides of cylinders, operated by camshaft.

LUBRICATION.—By pump from reservoir of large capacity at the bottom of crank case, equal to 400 miles running.

IGNITION.-Bosch magneto and accumulator and coil.

CARBURETTER.-Automatic. Petrol, pressure fed.

WATER COOLING.—Thermo-syphon, with extra large size radiator.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

TRANSMISSION & GEAR BOX.—Four forward speeds and reverse. Through drive on fourth speed.

BACK AXLE.—Worm or bevel drive, at option, with differential of ample dimensions.

BRAKES.—External band type, acting on main shaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, acting in conjunction with foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES.-820 mm. × 120 mm. Continental, Dunlop, or Michelin, at option.

BODY.—Of the type well-known as torpedo, with seating accommodation for five persons. Painted and upholstered in red, blue, green, or Belsize grey with green upholstery.

DIMENSIONS.—Wheel base, 10 ft.; track, 4 ft. 8 in.; length overall, 13 ft. 3 in.; width overall, 5 ft. 6 in.

Chassis only, including four Tyres, as specified... \$375

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time.




EXTRAS.

Fifth steel wheel with 820 mm. × 120 mm, tyre....f10 15 0

Two acetylene head lamps and brackets from 5 10 0



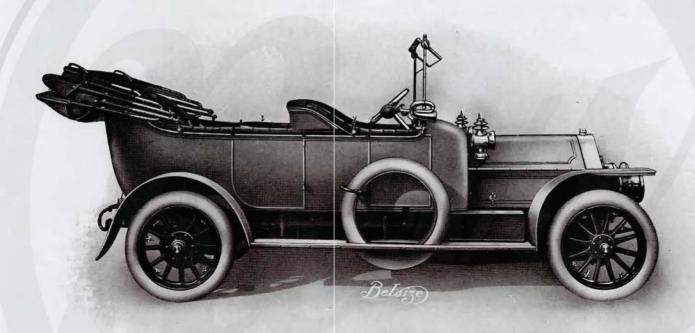

INSTITUTE

18-22 h.p. Belsize Six-cylinder Torpedo Car.

18-22 h.p. Six-cylinder Three-quarter Landaulette.

With Electric Side and Tail Lamps with Accumulators, or Oil Lamps, Horn and Tool Kit, ready for the Road

£575

If fitted with Rotax-Leitner Electric Lighting Sets for Side, Tail and Head Lamps

585

SPECIFICATION.

ENGINE.—Six cylinders, cast in pairs, each 31% in. (93 mm.) bore × 43 in. (120 mm.) stroke. Inlet and exhaust valves arranged on opposite sides of cylinders, operated by camshafts.

LUBRICATION.—By pump from reservoir of large capacity at the bottom of crank case, equal to 400 miles running.

IGNITION.—Bosch magneto and accumulator and coil.

CARBURETTER.—Automatic. Petrol, pressure fed.

WATER COOLING.—Thermo-syphon, with extra large size radiator.

CLUTCH.-Metal-to-metal, removable without disturbing engine or gear box.

TRANSMISSION & GEAR BOX.—Four forward speeds and reverse. Through drive on fourth speed.

BACK AXLE.—Worm or bevel drive, at option, with of ample differential dimensions.

BRAKES.—External band type, acting on mainshaft behind gear box, and internal expanding, acting on drums on back wheels.

CONTROL.—Single finger lever control on steering column, acting in conjunction with foot accelerator.

WHEELS.—Steel, or Riley "O" type wire, detachable, with bolt head attachment, at option.

TYRES.—820 mm. × 120 mm. Continental, Dunlop, or Michelin, at option. BODY.—A little more roomy than the standard landaulette, and fitted with windows behind the doors. The trimmings and finish throughout are absolutely of the best quality. It can be used as an open carriage, and when closed makes an ideal carriage for evening use. Fitted with extension front and luggage rail over driver's seat, and also double-glass wind screen.

DIMENSIONS.—Wheel base, 10 ft; track, 4 ft. 8 in.; length overall, 13 ft. 3 in.; width overall, 5 ft. 8 i in.

If fitted with ordinary
Landaulette body, with
folding back, extension
front, luggage rail on top,
and double-glass wind
screen, with lighting set £560

Chassis only, including four Tyres, as specified. £375

The above prices are based on the Tyre Lists issued by the various Companies in October, 1913.

The right is reserved to increase such prices if the list prices of Tyres should be advanced from time to time



EXTRAS.

Fifth steel wheel with $820 \text{ mm.} \times 120 \text{ mm.}$ tyre, fro 15 o

Two acetylene head lamps and bracketsfrom 5 10 0

Painting in other than standard colours 5



18-22 h.p. Six-cylinder Three-quarter Landaulette.

SUMMARY OF PRICES.

	10-12 H.P.	15-9 H.P.	18-22 H.P. 6 CYL
CHASSIS WITH TYRES	8′ 1″ w.b. £190 0 0 8′ 7¼″ w.b. £195 0 0	£265 0 0	£375 0 0
2 Seater	£215 0 0	£325 0 0	
4 SEATER	£240 0 0	£350 0 0	-
5-SEATER	-	£350 0 0	£460 0 0
SALOON COUPÉ	£315 0 0		_
Doctor's Landaulette	£340 0 0		— \ \ —
LANDAULETTE		£450 0 0	£560 0 0
LANDAULETTE			£575 0 0
HOOD AND SINGLE SCREEN	2 Seater £10 0 0 4 Seater £15 0 0	Included in Car price	Included in Car price
SPORTING MODEL		£375 0 0	
DICKEY SEAT ON 2 SEATER	£5 0 0	£7 10 0	-
PAINTING OTHER COLOURS THAN STANDARD	£5 0 0	£5 0 0	£5 0 0
DETACHABLE WHEELS, STEEL OR WIRE, INCLUDING CARRIER AND FITTING	£10 10 0 including 5th wheel and plain 800×85 tyre.	4 wheels included in Chassis price.	4 wheels included in all prices.
5th Wheel and Plain Tyre, Including Carrier and Fitting	800 × 85 tyre on wood detachable wheel, £7 10 0	815×105 For £9 9 0 Chassis Included in Car price.	$\begin{array}{c} 820 \times 120 \\ \textbf{£10} \textbf{15} \textbf{0} \end{array}$
HEAD LAMPS AND BRACKETS FITTED (ACETYLENE)	£5 10 0	According to size and make	According to size and make
ELECTRIC LIGHTING SET, INCLUDING SIDE, TAIL, AND HEAD LAMPS, IF ORDERED WITH CAR	£25 0 0	IT+IT	F -/
TOOL BOX ON STEP	£2 10 0	£2 10 0	£2 10 0
HOOD COVER FROM	£2 10 0	£2 10 0	£3 0 0
LUGGAGE CARRIER	£4 4 0	£4 4 0	£4 4 0
WARLAND DUAL RIMS AND DETACHABLE ARTILLERY WHEELS WITH SPARE RIM AND TYRE	£12 10 0	£12 10 0	£12 10 0

CHASSIS DETAILS.

	10-12 H.P.	15·9 H.P.	18-22 H.P. 6 CYL
NUMBER OF CYLINDERS	4	4	6
Bore × Stroke	$69 \text{ mm.} \times 130 \text{ m.m.} \ 2_{rac{\pi}{2}''} imes 5_{rac{1}{8}''}$	$80 \text{ mm.} \times 150 \text{ mm.} 3 \frac{5}{52}'' \times 5 \frac{7}{8}''$	$93 \ \mathrm{mm.} \times 120 \ \mathrm{mm.}$ $3\frac{11}{4}^{\prime\prime} \times 4\frac{3}{4}^{\prime\prime}$
R.A.C. Rating	11·8 H.P.	15·9 H.P.	32·7 H.P.
Tax	£3 3 0	£4 4 0	£8 8 0
Wheel Base	8' 1" 2 Seater 8' 7\frac{1}{4}" 4 Seater	9' 6"	10 ft.
Track	4′ 3″	4′ 3″	4′ 8″
LENGTH OVER ALL	11' 3" 2 Seater 11' 6" 4 Seater	12′ 9″	13′ 3″
WIDTH OVER ALL	5′ 3″	5′ 6″	5′ 6″
Chassis Weight	12 ewt.	17 ewt.	20 cwt.
BODY SPACE, DASH TO BACK BAR AND WIDTH	2 Seater, 7′ 3¼" × 2′ 8" 4 Seater, 7′ 5½" × 2′ 8"	$7' \ 9_4^{1''} \times 2' \ 8''$ for Car	8′ 0½″ × 2′ 8″ for Car
Dash to Centre Rear Wheel	2 Seater, 5' 104" 4 Seater, 6' 24"	6′ 9″ for Car	6' 10" for Car
Wheel Sizes	800 mm. × 85 mm.	815 mm. $ imes$ 105 mm.	820 mm. × 120 mm
GROUND CLEARANCE	11"	10"	10"
PETROL TANK CAPACITY	6 Gallons	10 Gallons	12 Gallons
ROAD SPEEDS AT 1,000 REVS. PER MIN. OF ENGINE	20·49 18·74 m.p.h. m.p.h.	26-5 m.p.h.	24.5 m.p.h.

CONDITIONS OF SALE.

THE prices quoted in the list are strictly nett, and include delivery at these works only. To suit purchasers' convenience, cars will, on request, be delivered to destination, but only at the purchasers' own risk and cost.

To the immediate purchaser from themselves, or their Agents, Belsize Motors Ltd. guarantee all Cars mentioned in this list for twelve months from the date of delivery. Such guarantee is limited to the repair or replacement of all parts giving out in the course of fair wear and tear on ordinary roads, suitable for Motor Cars of the class sold, in consequence of defects of material or workmanship. No contingent, consequential, or resulting liability, loss or damage whatever is covered by this guarantee. All parts complained of must be sent "carriage paid" to Belsize Works for inspection, with an intimation from the sender that he desires to have same repaired or replaced free of charge under this guarantee, and giving at the same time the number of the Car, name of Agent from whom purchased, and the date of purchase. If found to be within the terms of this guarantee, the Company will repair the part or furnish a new part, and hand same to the owner, or forward it to him.

Accessories not actually made in Belsize Works, such as tyres, lamps, magnetos, etc., do not come within the scope of the guarantee, but they are guaranteed to be the products of reliable makers, and the names will always be specified on application.

No responsibility is accepted when cars have been altered or repaired outside Belsize Works, nor is the Company responsible for any guarantees or warranties made by Agents beyond those expressed above. This guarantee is given in lieu of all implied guarantees, which are hereby expressly excluded.

All goods are sold on the terms of the Society of Motor Manufacturers and Traders' bond, which specifies, *inter alia*, that the Company's products shall not be exhibited at any Show, other than as sanctioned by the Society, under a penalty of £250, and the purchaser of the Company's productions will be held to have agreed to respect such terms.